

## LOW BAY LINEAR STRIP 45W-75W

A terrific source of light for any size restricted architectural applications. Our low bays offer a direct replacement for any commercial, industrial, retail and residential where illumination is required.



### FEATURES

- Outstanding optical design providing an efficient light source for size restricted areas.
- Anti-glare design enables a high safety rating.
- Built-in thermal conductivity aluminum heat sink ensures excellent heat dissipation extending lifespan.
- Dimming to 10%.
- Wide input voltage, AC100-277/AC200-480V.
- Available in 40W and 75W.
- Suitable for damp locations.
- Saves up to 60% energy consumption compared to traditional lighting.

# FUDAKIN™


## LED LIGHTING

### Product Parameters

MODEL	WATTS	INPUT VOLTAGE	LUMINOUS FLUX	CCT	CRI	BEAM ANGLE	WARRANTY	WORKING TEMP	MATERIAL
FDK-LLB-40-PF-XX-PF-D	40W	AC100-277V	≥5240lm	3000K	≥80	60-90°	5 years	-20° -50° C	Aluminium & PC
		or		4000K					
FDK-LLB-75-PF-XX-PF-D	75W	AC200-480V	≥9830lm	5000K					

### Product Dimensions

FDK-LLB-XX-PF-XX-PF-D

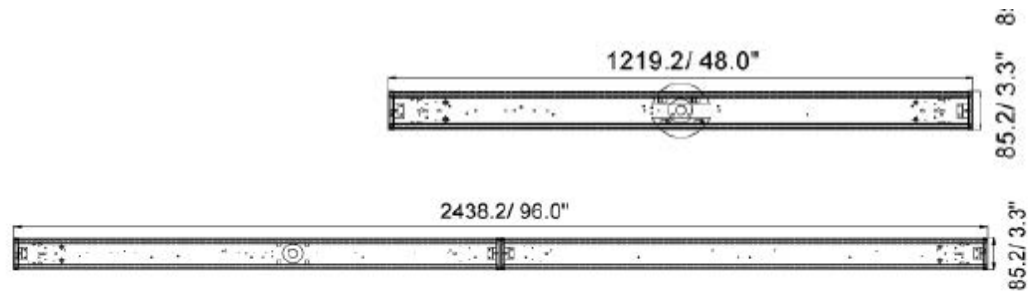

### Product Order Code

<b>FDK</b>	<b>PF</b>	<b>XX</b>	<b>PF</b>	<b>XX</b>	<b>PF</b>	<b>D</b>
FUDAKIN	PRODUCT SERIES LLB - Linear Low Bay	SIZE 4 - 4Ft 8 - 8Ft	WATTAGE 04 - 40 watt 075 - 75watt	INPUT VOLTAGE 27 - AC120-277V 48 - AC347-480V	CCT 30K - 3000K 40K - 4000K 50K - 5000K	DIMMABLE D - Dimmable

