

## ADJUSTABLE HIGH BAY 80W-300W

A terrific source of light for replacing any traditional metal halide lamps and linear fluorescent high bay systems. Our adjustable angled linear high bay blends outstanding technical innovation and quality design while reaching a high lumen output of 160lm/w.

### FEATURES

- Adjustable angled lens 30-60 degrees.
- Built-in thermal conductivity aluminum heat sink ensures excellent heat dissipation extending lifespan.
- Patented and Slim design, 50% slimmer than traditional high bays.
- Wide input voltage, AC100-277/AC200-480V
- Available in 80W, 100W, 150W, 185W, and 240W.
- Anti-glare design enables a high safety rating.
- High efficiency up to 160lm/w is ideal for illuminating large areas.
- SMART control with ZigBee system available, tunable and dimmable controls.
- Saves up to 60% energy consumption compared to traditional lighting.

# FUDAKIN™


## LED LIGHTING

### Product Parameters

MODEL	WATTS	INPUT VOLTAGE	LUMINOUS FLUX	CCT	CRI	BEAM ANGLE	WARRANTY	WORKING TEMP	MATERIAL
FDK-AHB-XX-08-XX-PF-D	80W	AC100-277V or AC200-480V	≥12800	3000K 4000K 5000K	≥80	30-60°	5 years	-40° -50° C	Aluminium
FDK-AHB-XX-10-XX-PF-D	100W		≥16000						
FDK-AHB-XX-15-XX-PF-D	150W		≥24000						
FDK-AHB-XX-18-XX-PF-D	185W		≥29600						
FDK-AHB-XX-24-XX-PF-D	240W		≥38400						

### Product Dimensions

FDK-AHB-XX-PF-XX-PF-D

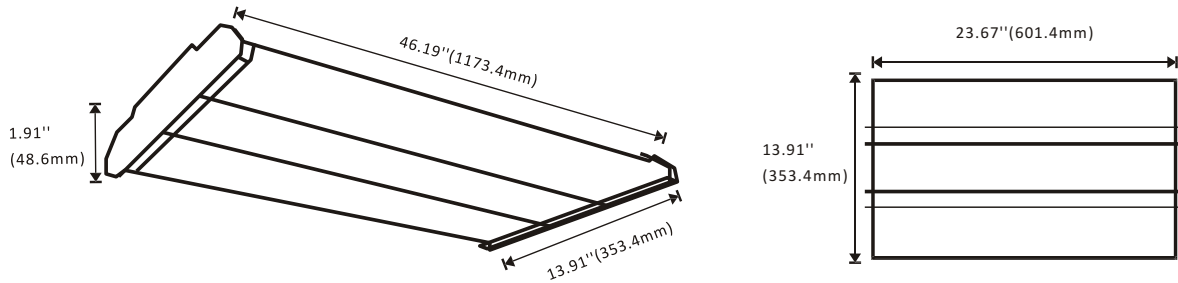

### Product Order Code

FDK	PF	XX	PF	XX	PF	D
FUDAKIN	PRODUCT SERIES AHG - Angled High Bay	SIZE 2 - 2Ft 4 - 4Ft	WATTAGE 08 - 80 watt 10 - 100 watt 15 - 150 watt 18 - 185 watt 24 - 240 watt	INPUT VOLTAGE 27 - 100-277V 48 - AC200 - 480V	CCT 30K - 3000K 40K - 4000K 50K - 5000K	DIMMABLE D - Dimmable

