

## REFRIGERATION LED T8

The Fudakin refrigeration LED T8 is a more traditional solution for display case lighting. Highly versatile the refrigeration T8 can be used in a number of applications within a retail or commercial environment, providing a high quality light source for any application.



### FEATURES

- Outstanding optical design providing an efficient light source.
- Rotatable end caps designed to fit plastic lamp holders.
- Built-in thermal conductivity aluminum heat sink ensures excellent heat dissipation extending lifespan.
- Shatter proof polycarbonate lens.
- Life span of more than 50,000 hours.
- AC100-277 external driver.
- Available in all standard T8 lengths.
- Available in standard and high output.
- Saves up to 60% energy consumption compared to traditional lighting.


# FUDAKIN™

## LED LIGHTING

### Product Parameters

MODEL	WATTS	INPUT VOLTAGE	LUMINOUS FLUX	CCT	CRI	BEAM ANGLE	WARRANTY	WORKING TEMP	MATERIAL
FDK-LT8R-024-PF-XXK-D-C93	4.8/9.6	DRIVER AC100-277V	480lm/960lm	3000K	≥90	60-90°	5 years	-20° -50° C	Aluminium & PC
FDK-LT8R-036-PF-XXD-D-C93	7.2/14.4		720lm/1440lm	3500K					
FDK-LT8R-048-PF-XXD-D-C93	9.6/19.2	LAMP DC 24V	960lm/1920lm	4000K					

### Product Dimensions

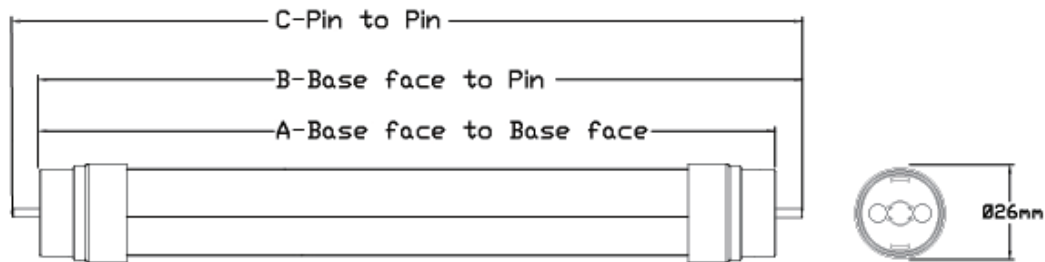

Model	A(mm)	B(mm)	C(mm)
4ft	1198.4	1205.4	1212.6
3ft	893.6	900.7	907.8
2ft	588.8	595.9	603

### Product Order Code

FDK	PF	XX	PF	XXK	D	C93
FUDAKIN	PRODUCT SERIES	SIZE	WATTAGE	CCT	DOUBLE END POWER	CRI
	LT8R - Linear T8 Refrigeration	024 - 2FT 036 - 3FT 048 - 4FT	048 - 4.8 watt 072 - 7.2 watt 096 - 9.6 watt 144 - 14.4 watt 192 - 19.2 watt	30K - 3000K 35K - 3500K 40K - 4000K	D - DOUBLE END POWER	C93 - CRI >90

